


1/2" PNEUMATIC IMPACT WRENCH | NS.1600F

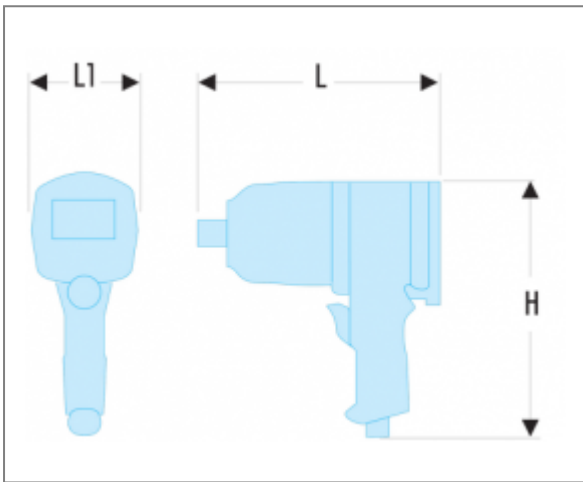

Description

- 3 power settings, “one hand” reverser.
- Supplied with hanging hook, reduces user fatigue.
- Monobloc body design extending its lifetime.
- Built-in shock absorbers protecting the tool from damage.
- Ergonomic soft handle:
 - Rubber coated aluminium.
 - Resists to hydrocarbons and solvents.
 - Ensures better grip.
 - Hydrocarbon and solvent resistant injected rubber coated aluminium grip reduces user fatigue.
- Delivers 635 ft-lbs, 860 N.m reverse torsion torque.
- Compact to enable access in difficult areas.
- Socket held by ball + pin.
- Maximum torque 861 N.m.
- Strokes per minute 1650 cpm.
- Idle speed 10000 rpm.
- 1/2" square drive.
- Operating pressure 6.2 bar.
- Average air consumption 127 l/min.
- 1/4" NPT tool connection.
- Min hose diameter. 10 mm - 3/8".
- Acoustic pressure 91.1 dB(A).
- Sound level 108.1 dB(A).
- Vibration 9.57 m/s²/a.
- Vibration 1.44 m/s²/K.

Information

H [mm]	173
L [mm]	111
L1 [mm]	61,5
[kg]	1,3